

PK TRAILERS



FORESTRY TRAILERS PSM



CHARACTERISTICS	PSM 180	PSM 200
gross weight	18000 kg	20000 kg
dead weight	2710 kg	3500 kg
net capacity	15290 kg	16500 kg
BPW axles	2 x 9 t	2 x 10 t
total length of trailer	7370 mm	8675 mm
length of plateau	5200 mm	6000 mm
trailer width	2550 mm	2550 mm
loading high (tyres 265/70 R19,5)	1215 mm	1270 mm
wheelbase	3850 mm	4750 mm



- very low weight
- 2 or 3 axles
- removable stake
- made of special steel with high strength

CHARACTERISTICS


TYPE OF FLOORING



fixed floor and welded bolster




modular floor and movable bolster

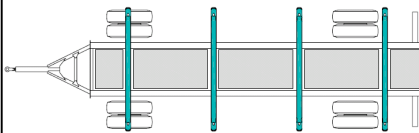


without flooring, only chassies
protection, movable bolster (first
front-welded bolster)

DRAWBAR

- drawbar with the silent bushing
- lenght: 1,8 m i 2 m
- towing eye diameter: 40 i 50 mm

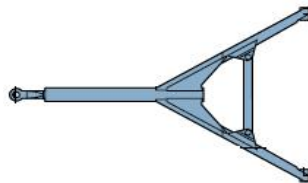


A - type drawbar

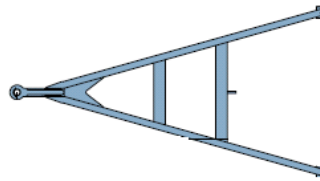


Y - type drawbar

SUSPENSION

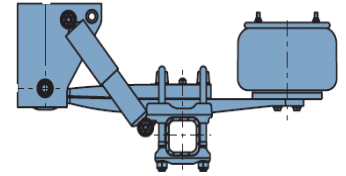

air suspension



mechanical suspension

BRAKES

EBS (Eletronic Braking System)
ensures a shorter braking
distance

**ALB (Automatic Load-dependent
Braking)**
adjusts breaking force
depending on the load



drum brakes





disc brakes

TRS (Trailer Roll Stability)
prevents from lateral
rollover

TYRES

- 8 x 265/70 R19,5
- 8 x 275/70 R22,5
- aluminium wheel rim
- steel wheel rim



EXTE STAKES

- ExTe movable bolster
- option: 2, 3 ili 4 pairs of stakes
- type: aluminium stakes E6
aluminium stakes E9
steel stakes C144



aluminium ExTe stakes E9



aluminium ExTe stakes E6



steel ExTe stakes C144



ECO tronic system-
info center with scale and
monitor for measuring
the total weight of the
trailer

TIPPER TRAILERS PSK



CHARACTERISTICS PSK

gross weight from 5 - 24 GVW

trailer with rear tipper

high-quality BPW axles

ECO tronic system - info center with scale and monitor for measuring the total weight of the trailer

steel floor made of special steel



profiled "Z" boards made of special steel



rear board opening: - "a libro - opening"
- side opening
- tipper opening



PLATFORM TRAILERS PTS



CHARACTERISTICS PTS

gross weight 10 - 24 GVW

"custom made" according to the customer's request

high-quality BPW axels

ECO tronic system - info center with scale and monitor for measuring the total weight of the trailer

2-axle or 3-axle construction

steel or aluminium boards

galvanized chassis and frame box



LOW LOADER TRAILS PRS



CHARACTERISTICS PRS
gross weight from 10 - 30 GVW
high-quality BPW axles
ECO tronic system - info center with scale and monitor for measuring the total weight of the trailer
hydraulic or mechanical ramps
single or double foldable ramps
made from special steel
low loading high
air parking brake



CONTAINER TRANSPORT TRAILERS PKM



CHARACTERISTICS PKM

gross weight from 18 - 24 GVW

for transporting containers from 5, 7, 10 m³
according to DIN 30720

for transporting "abroll" containers up to 7 m length
according to DIN 30722

slideway

high-quality BPW axles

ECO tronic system - info center with scale and
monitor for measuring the total weight of the trailer

air suspension

pneumatic "safety-locking"
- system for locking containers

hook for mechanical security containers



POLES TRAILER PST



CHARACTERISTICS	PST 90	PST 50
gross weight	9000 kg	5000 kg
dead weight	2040 kg	1340 kg
net capacity	7960 kg	3660 mm
dimension of the tyres	12 R22,5	12 R22,5
total length of trailer	7100 mm	6015 mm
loading high	1670 mm	1770 mm
telescopic poles for load the cargo (and bolster) on the turntable	1 pair	1 pair
width between poles	2000 mm	2000 mm
BPW axles, mehanical suspension, adjustable length ore (sliding) air parking brake		



SEMITRAILERS FOR CONSTRUCTION PPG



CHARACTERISTICS PPG

gross weight from 30 - 60 GVW

"custom made" according to the customer's request

high-quality BPW axles

ECO tronic system - info center with scale and monitor for measuring the total weight of the trailer


hydraulic or mechanical ramps

single or double foldable ramps

made from special steel



SELF-COMPACTING SEMITRAILER PPK



Self-compacting semitrailer PPK 020 RC is designed for municipal activities and equipped with hydraulic-system for waste compacting. On waste transfer stations the waste is loaded, pushed and compacted by pressure plate and sliding floor. Semitrailer is also equipped with triple control system: manual, cable and radio remote control. Semitrailer is equipped with an auxiliary engine which make up to PPK 020 RC autonomous i.e. works without being connected to the truck power.

SELF-COMPACTING SEMITRAILER PPK



Self-compacting semitrailer PPK 020 is designed for waste compacting and transporting from waste transfer stations to the central county waste management centre. In addition to the system of waste compacting, this semitrailer has installed high-pressure wash system of loading space.





PRODUCTION FACTORIES



PK-PRODUCTION AND SERVICE
FACTORY RIJEKA



PK-SERVICE CENTER
ZAGREB



PALFINGER SRBIJA
BEOGRAD

PK PRODUCTS



PK IS DEALER FOR



TAKEMUCHI



CONTACT

Centrala Rijeka:
Industrijska zona R-27
51223 Skrljevo

tel: +385 51 503 150
fax: +385 51 252 002
e-mail: info@pk-rijeka.hr

Poslovni centar Zagreb
Industrijska 5
10370 Dugo selo

tel: +385 1 2754 219
fax: +385 1 2754 606
e-mail: info@pk-rijeka.hr